


1 Connecting Your Wireless Router

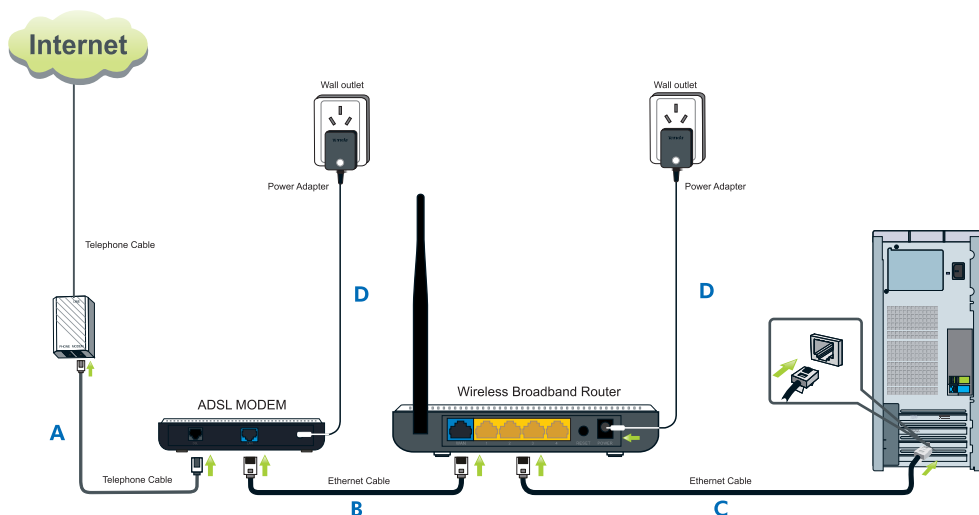

Note:

Before you begin, make sure your computer and modem are turned off. If you're using Static IP, Dynamic IP or PPPoA other than PPPoE to access Internet, refer to the user manual.

- Connect one end of the telephone cable to the DSL port on your modem and the other end of the cable into the splitter;
- Connect one end of the Ethernet cable to RJ45 port of your modem and attach the other end to the WAN port of the Tenda Router;
- Connect the new cable (not provided in the box) to one of the 4 LAN on the Tenda Router, and plug the other end into your computer;
- Complete the process by connecting the power adapter to the Power input of your modem, and plug the other end into a wall outlet. Do the same procedure to power up the Tenda Router.